




Transformers mainly suited for building into power supply circuitry of electronic devices and low-voltage lighting systems, featuring small dimensions and weight and low magnetic dispersion. The transformers are made with Class II insulation and protection grade IP00. Maximum ambient temperature 40°C, thermal class of insulation B (130°C). Manufactured in compliance with EN 61558-2-4 and EN 61558-2-6.

Rated power: 20 - 1000 VA

Rated voltage PRI: 110-500 V 50/60 Hz

Rated voltage SEC: 6-250 V

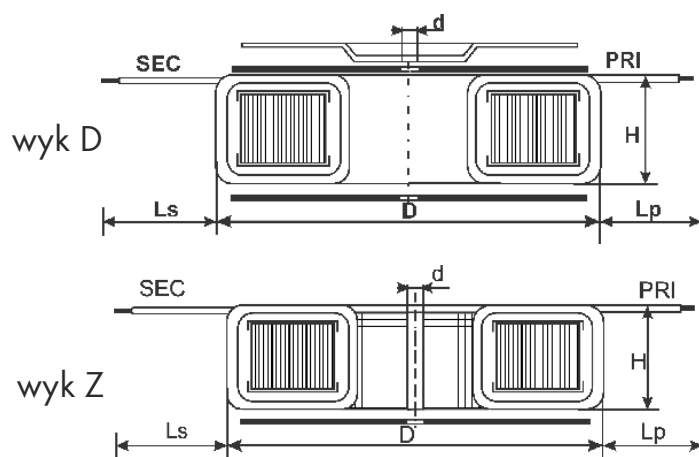

Type	Power (VA)	Dimenions (mm)					Mounting	Weight (kg)
		D	H	Lp	Ls	d		
TTS 20	20	62	32	70	70	5,5	M5	0,40
TTS 35	35	68	36	100	100	5,5	M5	0,50
TTS 50	50	78	38	100	100	5,5	M5	0,70
TTS 60	60	78	38	100	100	5,5	M5	0,70
TTS 100	100	92	40	100	100	5,5	M5	1,10
TTS 150	150	102	46	120	120	5,5	M5	1,70
TTS 200	200	112	50	120	120	6,5	M6	2,10
TTS 250	250	114	56	120	150	6,5	M6	2,40
TTS 300	300	128	56	120	150	6,5	M6	2,70
TTS 450	450	135	62	120	150	6,5	M6	3,60
TTS 600	600	139	77	120	150	6,5	M6	4,70
TTS 1000	1000	158	84	150	150	6,5	M6	7,40
TTS 1600	1600	195	90	150	150	6,5	M6	10,20
TTS 2000	2000	225	85	200	200	8	M8	18,00
TTS 2500	2500	235	90	200	200	8	M8	23,00

As a result of constant development of product construction and changes concerning technical requirements, Breve Tufvassons reserves the right to change the parameters mentioned above.