

Feature

- Hermetic ceramics-metal stud structure
- Conform to national standard JB/T8949.2-1998
- Capacity of supporting high surge current
- Stud cathode and strd anode version

Typical Application

- DC motor controls Controls DC power supplie
- AC switch and thermal control Synchronous motor exditation

$I_{F(AV)}$	50A
V_{RRM}	100-5000V
I_{FSM}	8.25 KA
I^2t	1450 A ² S

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	T _j (°C)	VALUE		UNIT
				Min	Max	
$I_{F(AV)}$	Mean forward current	180° half sine wave, 50HZ Single heat sink, T _C =98°C	150		50	A
$I_{F(RMS)}$	RMS current		150		65	A
V_{RRM}	Repetitive peak reverse voltage	$V_{DRM} \& V_{RRM} t_p=10ms$ $V_{DSM} \& V_{RSM}=V_{DRM} \& V_{RRM}+200V$	150	100	5000	V
I_{RRM}	Repetitive peak current	$V_{RM}=V_{RRM}$	150	4.5	9	mA
I_{FSM}	Surge on-state current	10ms half sine wave	150		8.25	KA
I^2t	I^2t for fusing coordination	$V_R=0.6V_{RRM}$			1450	A ² S
V_{TO}	Threshold voltage		150		0.80	V
r_T	On-state slop resistance				0.49	mΩ
V_{FM}	Peak on-state voltage	$I_{TM}=30A, F=9.0KN$	150	1.3	1.5	V
I_{rm}	Reverse recovery current	$I_{TM}=30A, t_q=1000us$ $Di/dt=-20A/us.$ $V_i=50V$	150		70	A
t_{rr}	Reverse recovery time				4.0	us
Q_{rr}	Recovered charge				140	uC
$R_{th(j-h)}$	Thermal impedance node to the shell	180 ° sine wave, single heat sink			0.090	°C/W
F_M	Mounting force				23	N
T_{stq}	Stored temperature			-65	190	°C
W_t	Weight			140		g
Outline						

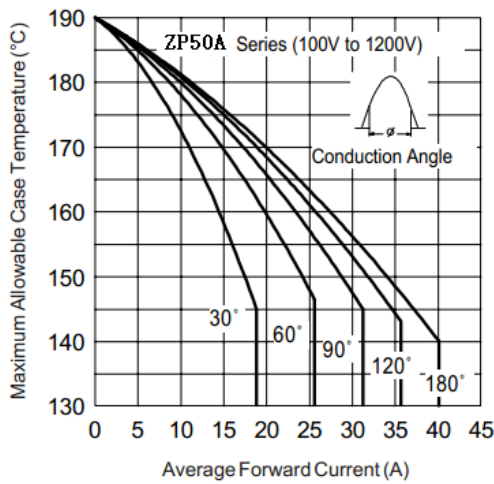


Fig. 1 - Current Ratings Characteristics

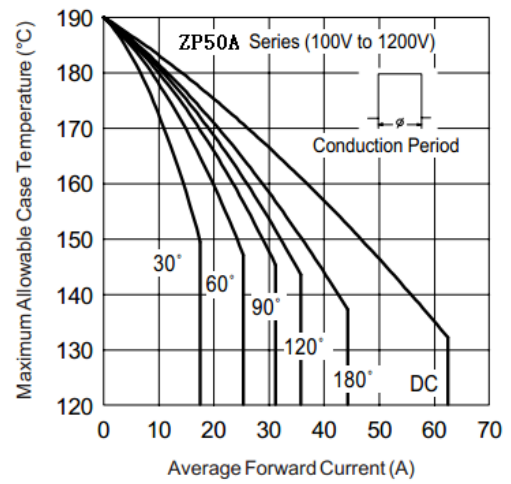


Fig. 2 - Current Ratings Characteristics

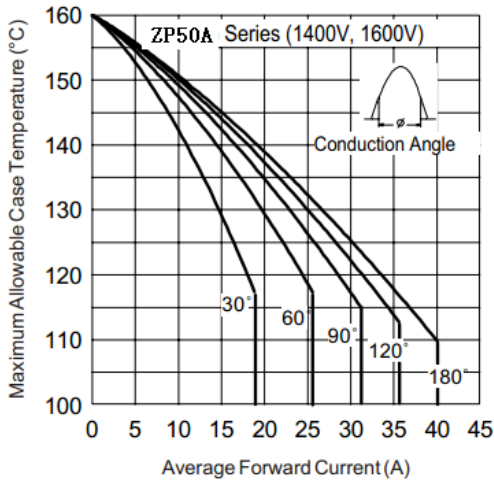


Fig. 3 - Current Ratings Characteristics

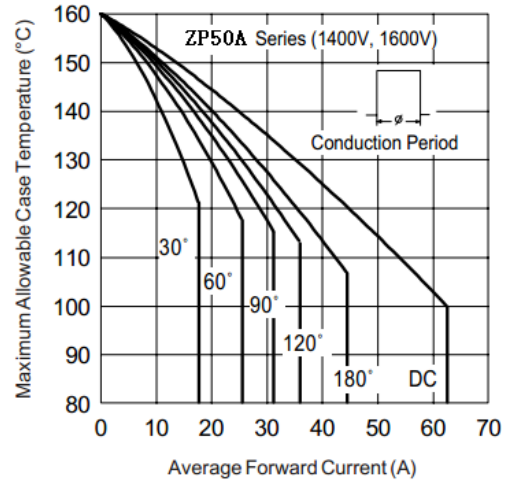


Fig. 4 - Current Ratings Characteristics

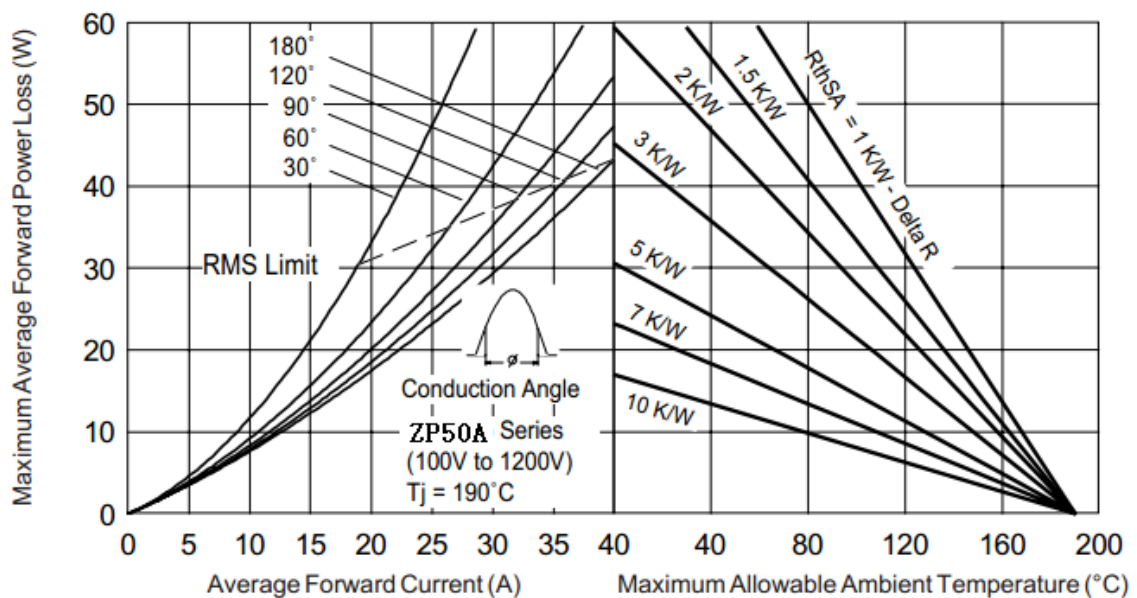


Fig. 5 - Forward Power Loss Characteristics

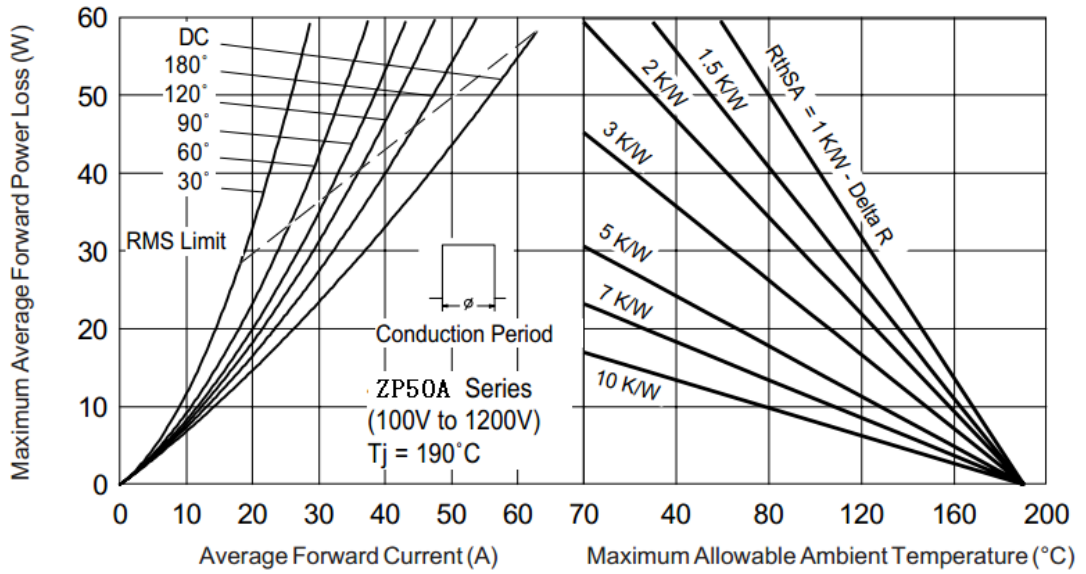


Fig. 6 - Forward Power Loss Characteristics

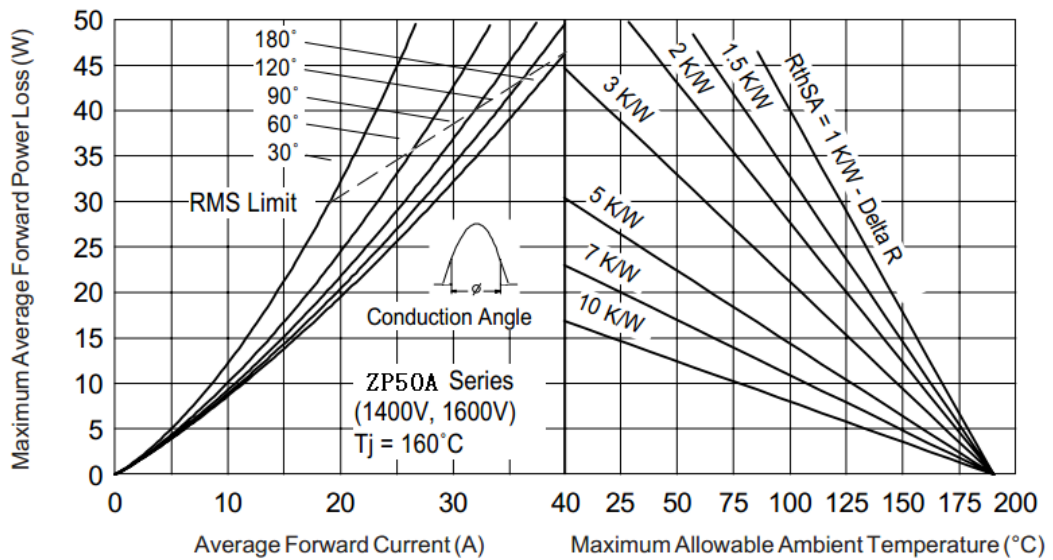


Fig. 7 - Forward Power Loss Characteristics

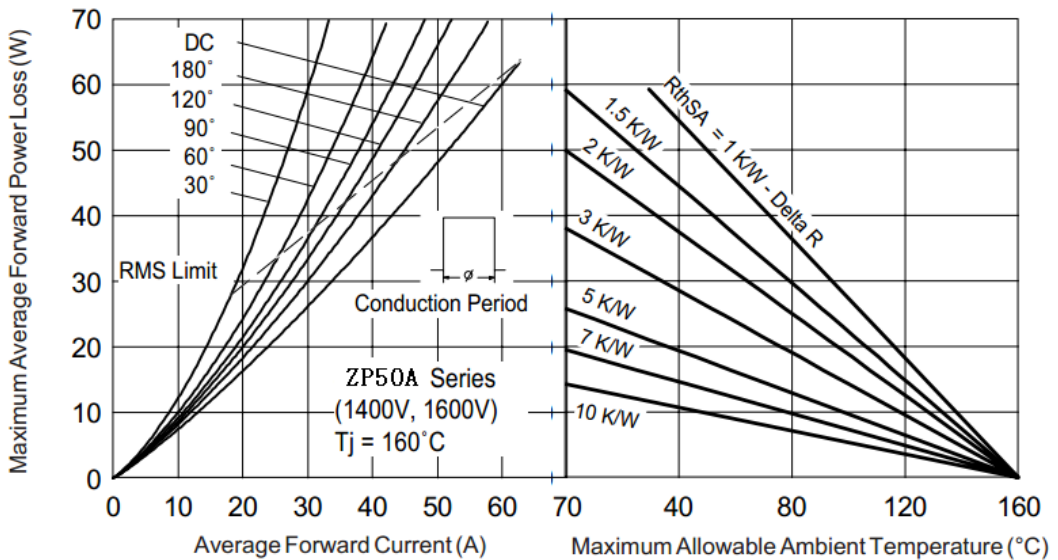


Fig. 8 - Forward Power Loss Characteristics

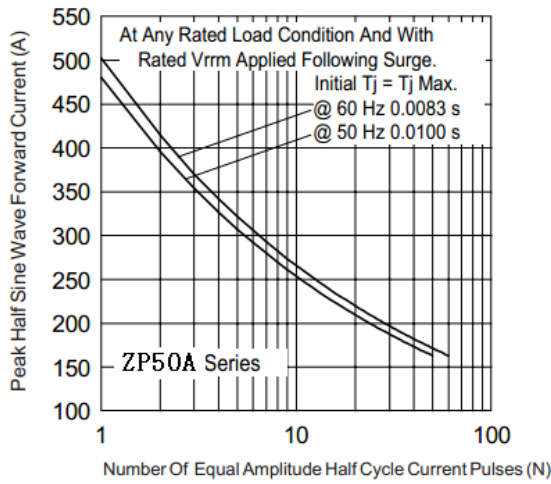


Fig. 9 - Maximum Non-Repetitive Surge Current

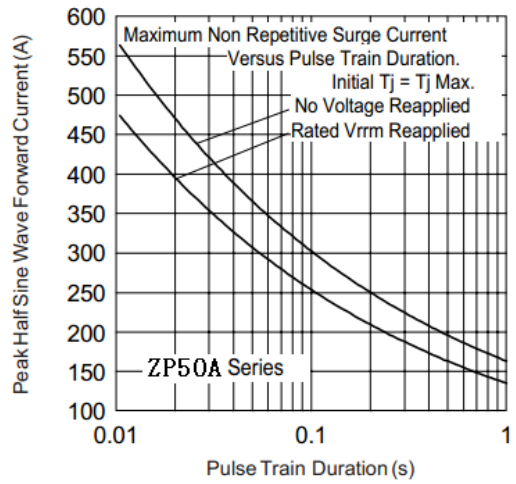


Fig. 10 - Maximum Non-Repetitive Surge Current

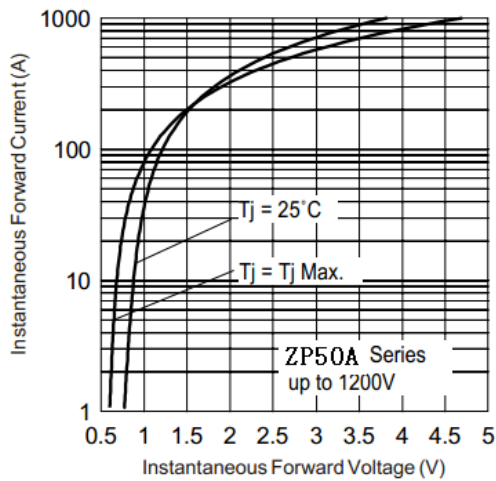


Fig. 11 - Forward Voltage Drop Characteristics (up to 1200V)

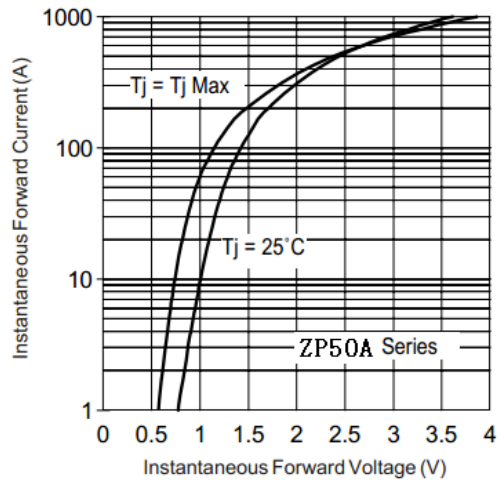


Fig. 12 - Forward Voltage Drop Characteristics (for 1400V, 1600V)

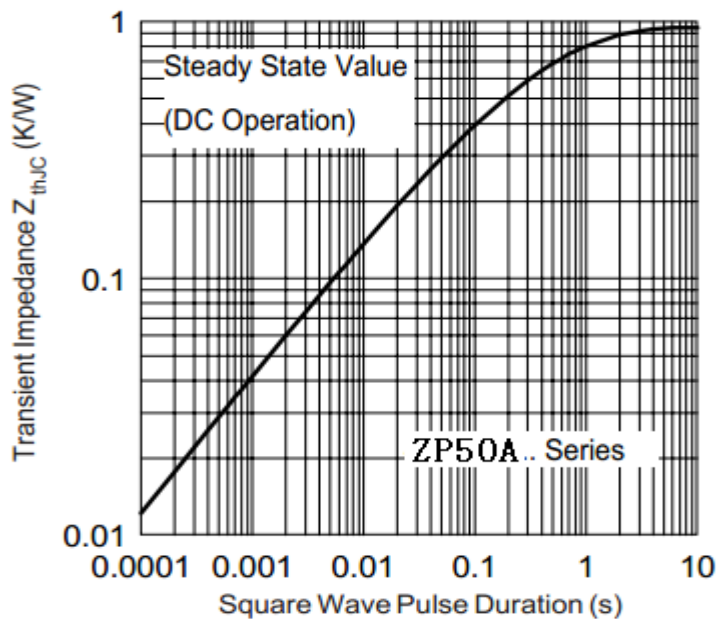


Fig. 13 - Thermal Impedance Z_{thJC} Characteristics

Outline:

